


CITY OF ANAHEIM ELECTRICAL NOTE

THERE ARE EXISTING 69KV, 12KV AND STREETLIGHT OVERHEAD AND UNDERGROUND ELECTRICAL FACILITIES WITHIN THE PROJECT'S BOUNDARY. PLEASE PROTECT ALL ABOVEGROUND AND UNDERGROUND ELECTRICAL FACILITIES IN PLACE AND CONTACT UTILITY INSPECTOR JEFF ROBISON AT 714-292-8881 PRIOR TO WORKING WITHIN PROXIMITY TO ENERGIZE ELECTRICAL FACILITIES.

ANY ADJUSTMENTS OF ELECTRICAL PULLBOXES AND VAULTS TO FINAL GRADE, PLEASE COORDINATE WITH UTILITY INSPECTOR AT LEAST 48 HOURS PRIOR TO THE PLANNED WORK. MAINTAIN ALL CLEARANCES PER GENERAL ORDER 95 AND 128. ANY PROPOSED ELECTRICAL PULLBOXES/VAULTS/POLES REQUIRING RELOCATION REQUIRED, PLEASE CONTACT VINH TRAN AT 714-765-4273.

PROFILE SCALE

HORIZ. 1"=20'
VERT. 1"= 2'

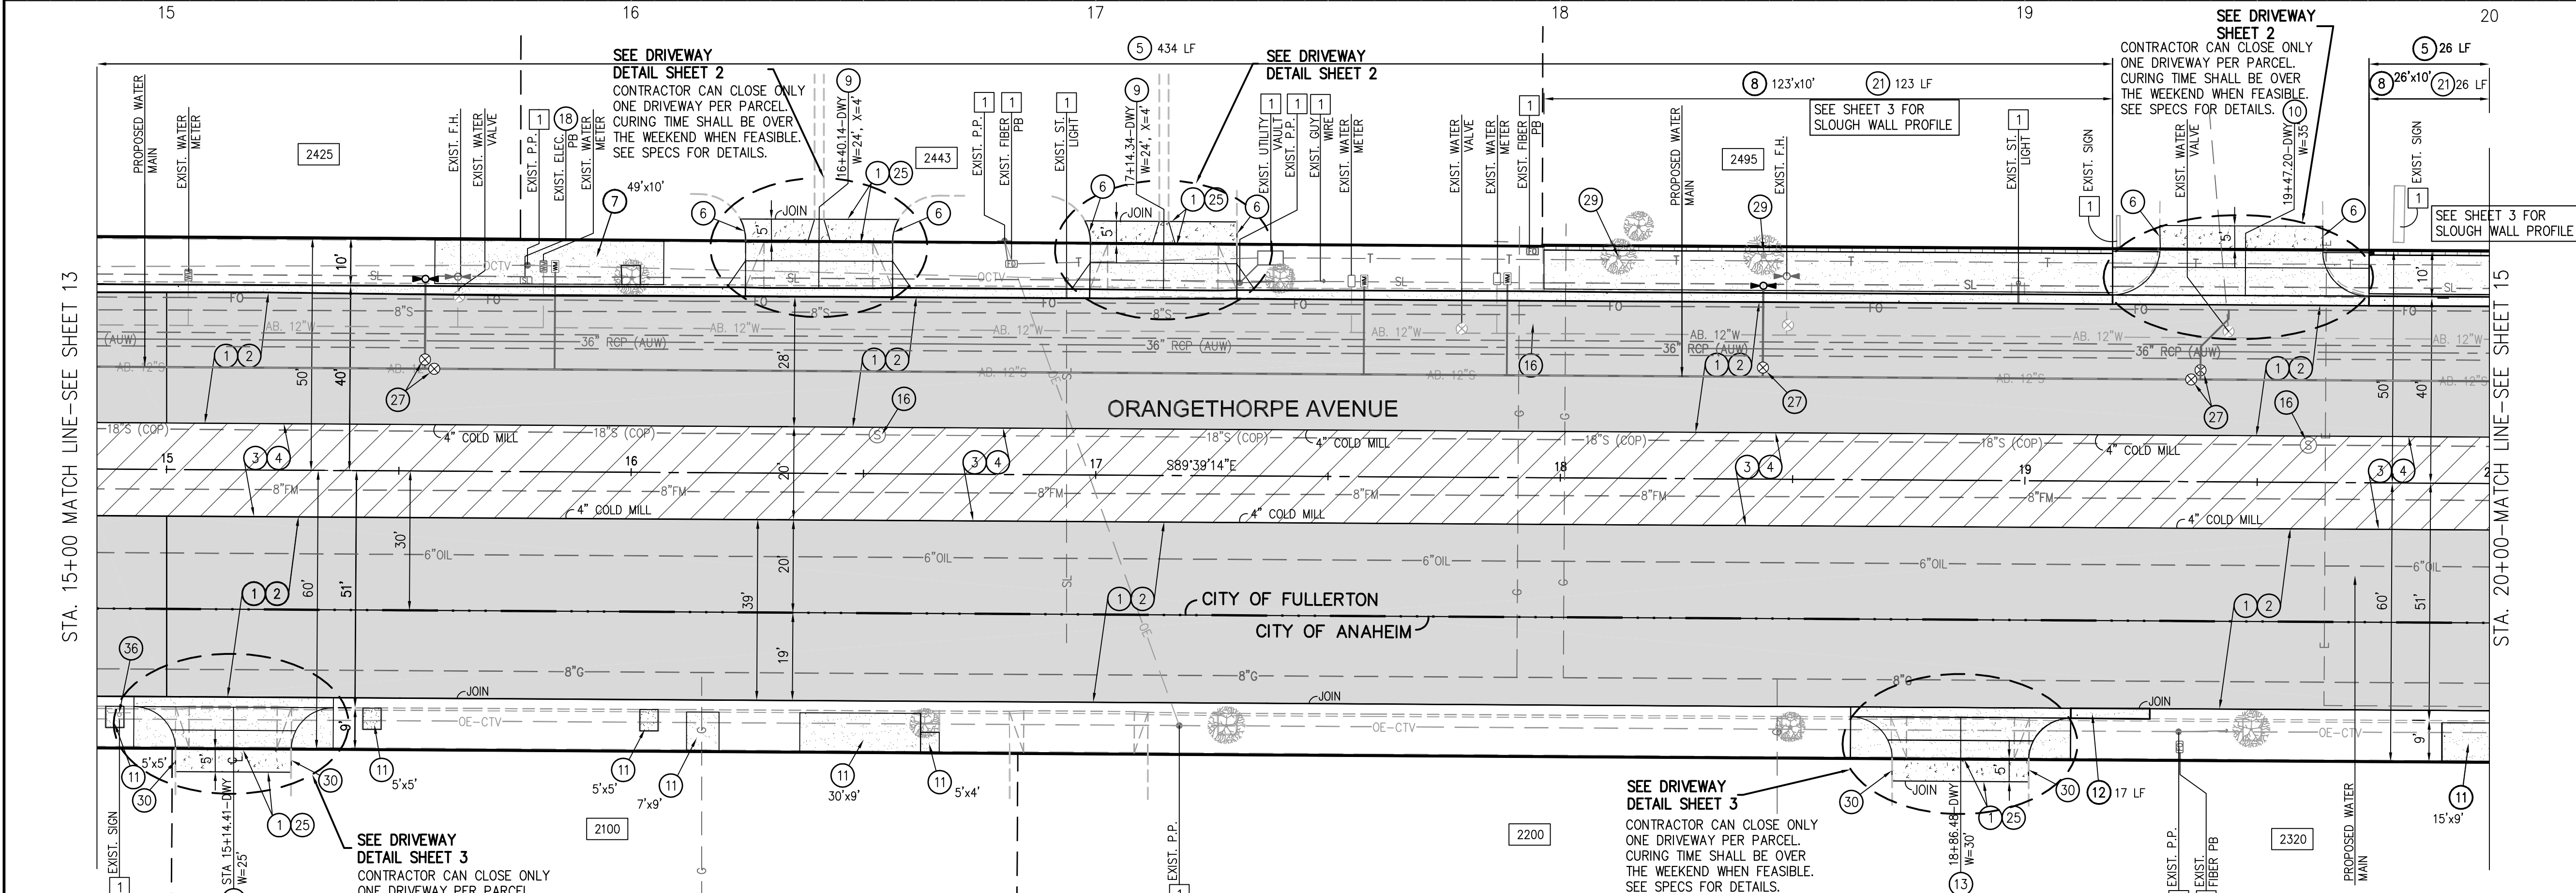

CONSTRUCTION NOTES

- EXCAVATE FOR PROPOSED STRUCTURAL SECTION AND IMPROVEMENTS.
- CONSTRUCT 7" AC, INCLUDED 2" THICK ARHM SURFACE COURSE OVER 14" CLASS II AB.
- COLD MILL 4" THICK EXISTING AC PAVEMENT.
- CONSTRUCT 4" AC, INCLUDES 2" THICK ARHM SURFACE COURSE.
- REMOVE AND RECONSTRUCT CURB & GUTTER PER CITY OF FULLERTON STD PLAN NO. 120, TYPE A. (VARIABLE CF) TO MATCH EXIST. TOP OF CURB.
- CONSTRUCT CURB PER CITY OF FULLERTON STD PLAN NO. 120, TYPE B-1 (6"CF).
- REMOVE EXIST. IMPROVEMENTS AND RECONSTRUCT CONC. SIDEWALK PER CITY OF FULLERTON STD PLAN NO. 122.
- CONSTRUCT CONC. SIDEWALK PER CITY OF FULLERTON STD PLAN NO. 122.
- REMOVE AND RECONSTRUCT DRIVEWAY APPROACH (COMMERCIAL) PER CITY OF FULLERTON STD PLAN 121-2. CONCRETE TO BE HIGH EARLY STRENGTH CONCRETE MIX W/COMP. STRENGTH OF 3000 PSI IN 24 HOURS.
- REMOVE AND RECONSTRUCT MODIFIED ALLEY APPROACH DRIVEWAY PER CITY STD PLAN 121-3. CONCRETE TO BE HIGH EARLY STRENGTH CONCRETE MIX W/COMP. STRENGTH OF 3000 PSI IN 24 HOURS.
- REMOVE EXIST. IMPROVEMENTS AND RECONSTRUCT SIDEWALK PER CITY OF ANAHEIM STD PLAN 110-B.
- REMOVE AND RECONSTRUCT CURB & GUTTER PER CITY OF ANAHEIM STD PLAN 120, TYPE A, 8" CF.
- REMOVE AND RECONSTRUCT DRIVEWAY APPROACH PER CITY OF ANAHEIM STD PLAN 115-B. CONCRETE TO BE HIGH EARLY STRENGTH CONCRETE MIX W/COMP. STRENGTH OF 3000 PSI IN 24 HOURS.
- ADJUST EXIST. MANHOLE TO GRADE PER CITY OF FULLERTON STD PLAN 204.
- CONSTRUCT CMU SLOUGH WALL PER DETAIL SHEET 3.
- CONSTRUCT 6" PCC OVER NATIVE. CONCRETE TO BE HIGH EARLY STRENGTH CONCRETE MIX W/COMP. STRENGTH OF 3000 PSI IN 24 HOURS.
- ADJUST EXIST. WATER VALVE TO GRADE.
- EXISTING TREE TO BE REMOVED BY OTHERS.
- REMOVE AND RECONSTRUCT CURB PER CITY OF ANAHEIM STD PLAN 120, TYPE C, 6" CF.
- REMOVE AND REINSTALL "NO PARKING ANY TIME" SIGN.

DISPOSITION NOTE

- PROTECT IN PLACE

LEGEND

- 2" COLD MILL AND 2" AC OVERLAY
- 4" AC INCLUDES 2" AC SURFACE COURSE
- 7" AC INCLUDES 2" AC SURFACE COURSE OVER 14" CLASS II AB

THESE PLANS WERE PREPARED UNDER THE SUPERVISION OF:



SIGNATURE DATE

REVISIONS

NUMBER	DESCRIPTION	DATE	DRAWN	DESIGNED	REVIEWED	STREET	SEWER	DRAINAGE	WATER	TRAFFIC	UTILITY/ELEC	LANDSCAPE	FACILITIES	GENERAL ENG	DESIGN ENG	INSPECTION	PARKS & REC	AS-BUILT

CITY OF FULLERTON
PUBLIC WORKS DEPARTMENT

ORANGETHORPE AVENUE RECONSTRUCTION PROJECT
CIP PROJECT

STREET IMPROVEMENTS-ORANGETHORPE AVE
FROM STA. 15+00 TO STA. 20+00

APPROVED:

DATE CITY ENGINEER/ASSISTANT PUBLIC WORKS DIRECTOR

ACCEPTED:

DATE PUBLIC WORKS DIRECTOR


SCALE: 1" = 20'

CITY OF FULLERTON BM NO.: 35-37 ELEV = 173.90'
B.M.: P.K. NAIL IN LEAD, N.E. COR. RAYMOND AND WILSHIRE, E.
CURB OF RAYMOND, 1" N. OF E.C.B.

SHEET 14 OF 21 SHEETS

7082

GRAPHIC SCALE



(IN FEET)
1 inch = 20 ft.